


SERIES 2000

RADIALLY SPLIT BEARING FRAME PUMP MOUNTED WITH FLEXIBLE COUPLING

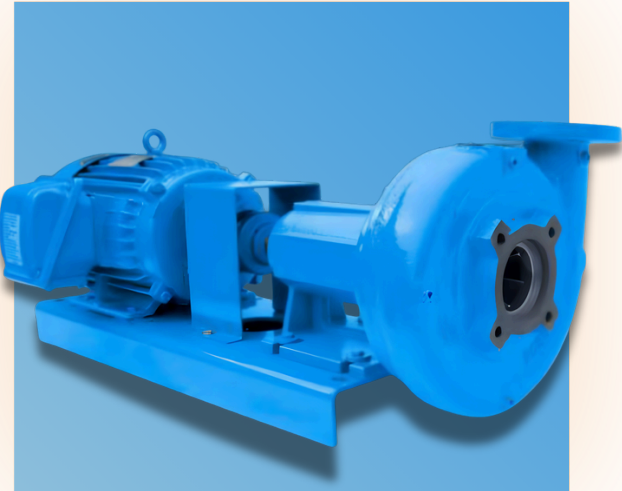

[Datasheet](#)

[Features](#)

[Performance Curves](#)

CASING

Impeller/volute matching minimizes volute losses. The advanced impeller has been carefully matched by computerized design and testing to a volute of superior design. The matching of internal pressures and velocities improves hydraulic efficiency, allowing the impeller to produce its certified design flow and head, thus minimizing wasted horsepower. The volute design has four casing positions available. Gauge tapings make measuring pump pressure differential easy.

MECHANICAL SEAL

Long-life mechanical seal is supplied with Viton elastometer, 303 stainless steel parts, carbon rotating washer and silicon carbide seat. Pre-assembled on a bronze shaft sleeve to assure correct mechanical seal positioning and ease of servicing.

SHAFT

Slip-fitted, pin-locked bronze shaft sleeve extending through seal box prevents shaft wear and corrosion. Elastometer gaskets seal both the shaft sleeve and the impeller cap screw to prevent shaft corrosion and isolate shaft from pumped liquid.

IMPELLER

New, unique 8-bladed impeller with vastly improved flow hydraulics stabilizes flow and reduces turbulence. Manufactured by Vacuum-cast foundry process that provides smooth waterways and dimensional control not found in sand casting.

QUICK DISCONNECT

Back pull-out design allows maintenance without disturbing the piping.

Up to
280 ft.

Head

Up to
1900
US GPM

Flow

175 PSI

Max.
Pressure


300°F

Max.
Temperature

Pump Models & Sizes

- 1 2x1-6
- 2 2x1.5-6
- 3 2x1.5-6
- 4 2.5x2-6
- 5 2x1-8
- 6 2x1-8
- 7 2x1.5-8
- 8 2x1.5-8
- 9 2.5x2-8
- 10 3x2.5-8
- 11 4x3-8
- 12 5x4-8
- 13 2.5x2-10
- 14 3x2.5-10
- 15 4x3-10
- 16 5x4-10
- 17 6x5-10
- 18 2x1.5-12
- 19 2.5x2-12
- 20 4x3-12
- 21 5x4-12
- 22 6x5-12

1750 RPM

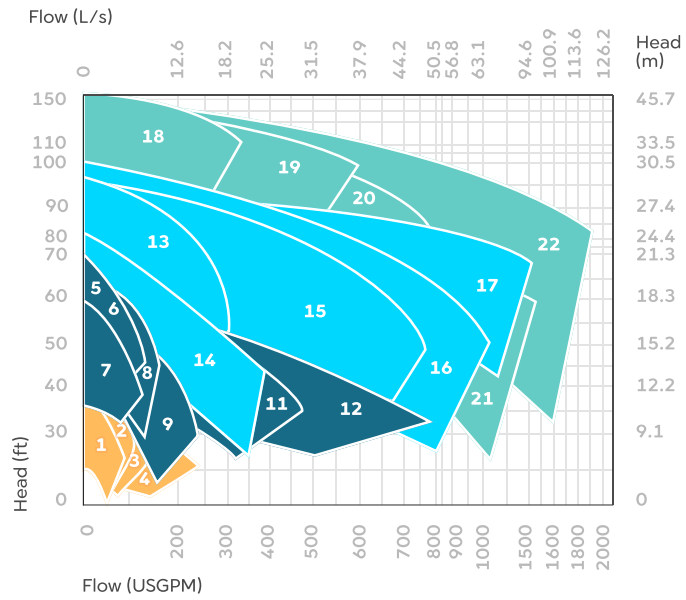

3450 RPM

