


|                  |                |
|------------------|----------------|
| Working pressure | 16 Bar         |
| Medium           | W. O. G        |
| Shell test       | 2.5 MPa        |
| Flange to        | ANSI Class-150 |



| SIZE (DIN) | SIZE (ANSI) | L    | H     | $\phi d$ | $\phi k$ | N- $\phi f$     | $\phi D$ | F    |
|------------|-------------|------|-------|----------|----------|-----------------|----------|------|
| 250        | 10"         | 511  | 349.3 | 254      | 362      | 12- $\phi 25.4$ | 406.4    | 624  |
| 300        | 12"         | 667  | 416   | 305      | 431.8    | 12- $\phi 25.4$ | 482.6    | 756  |
| 350        | 14"         | 768  | 558.8 | 355.6    | 476.3    | 12- $\phi 28.5$ | 533.4    | 924  |
| 400        | 16"         | 841  | 590.6 | 406.4    | 539.8    | 16- $\phi 28.5$ | 596.9    | 1008 |
| 450        | 18"         | 975  | 711.2 | 457.2    | 577.9    | 16- $\phi 32$   | 635      | 1156 |
| 500        | 20"         | 1054 | 812.8 | 508      | 635      | 20- $\phi 32$   | 698.5    | 1279 |
| 600        | 24"         | 1054 | 812.8 | 609.6    | 749.3    | 20- $\phi 35$   | 812.8    | 1356 |

|     |        |              |
|-----|--------|--------------|
| 7   | Plug   | Carbon steel |
| 6   | Nut    | SS304        |
| 5   | Bolt   | SS304        |
| 4   | O-ring | EPDM         |
| 3   | Screen | SS304        |
| 2   | Cover  | DI           |
| 1   | Body   | DI           |
| NO. | Name   | Material     |

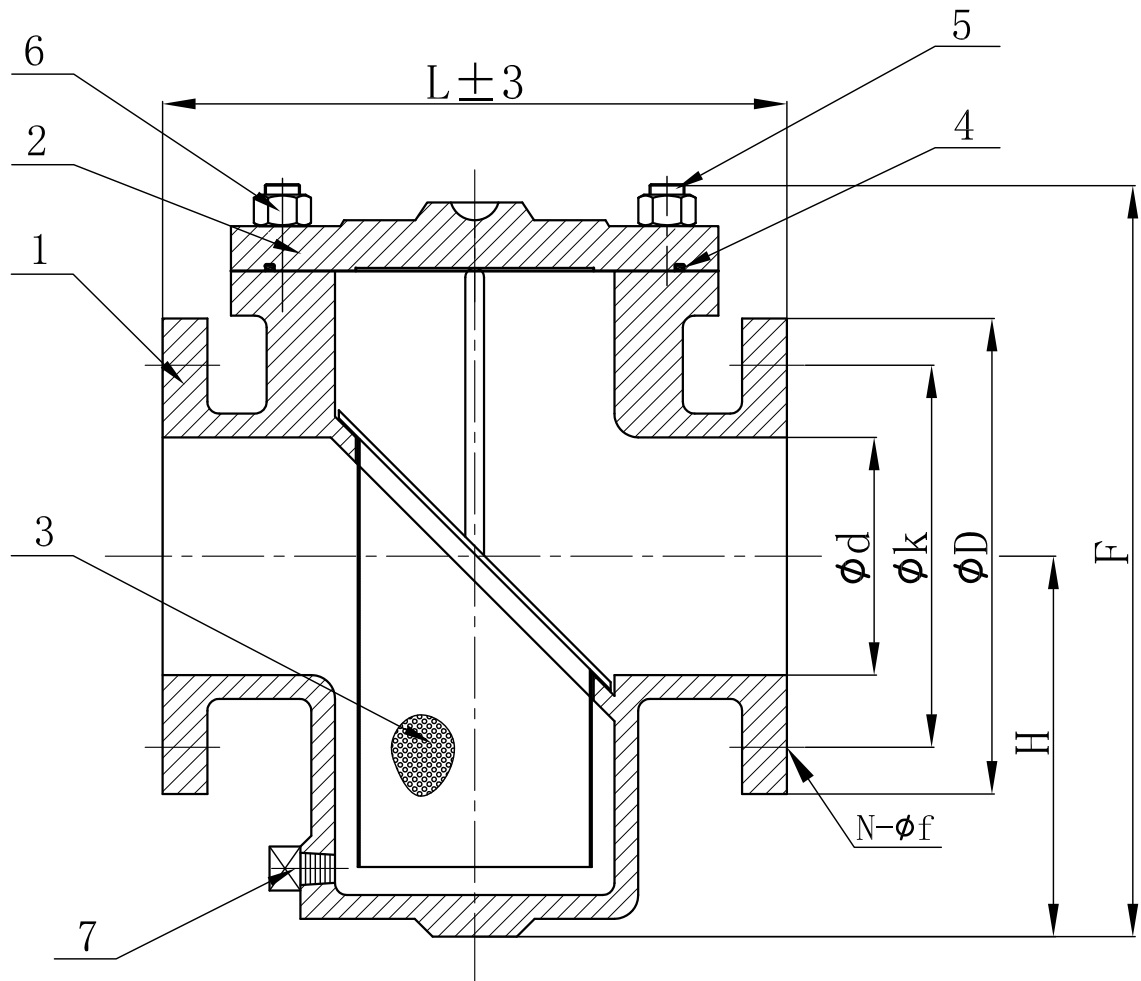

MONTREAL, (QC), CANADA  
TORONTO, (ON), CANADA  
LAKE WORTH, (FL), USA  
WWW.FLOFAB.COM

Basket Strainer  
10"-24"

TYPE-1

SHEET 1 OF 1